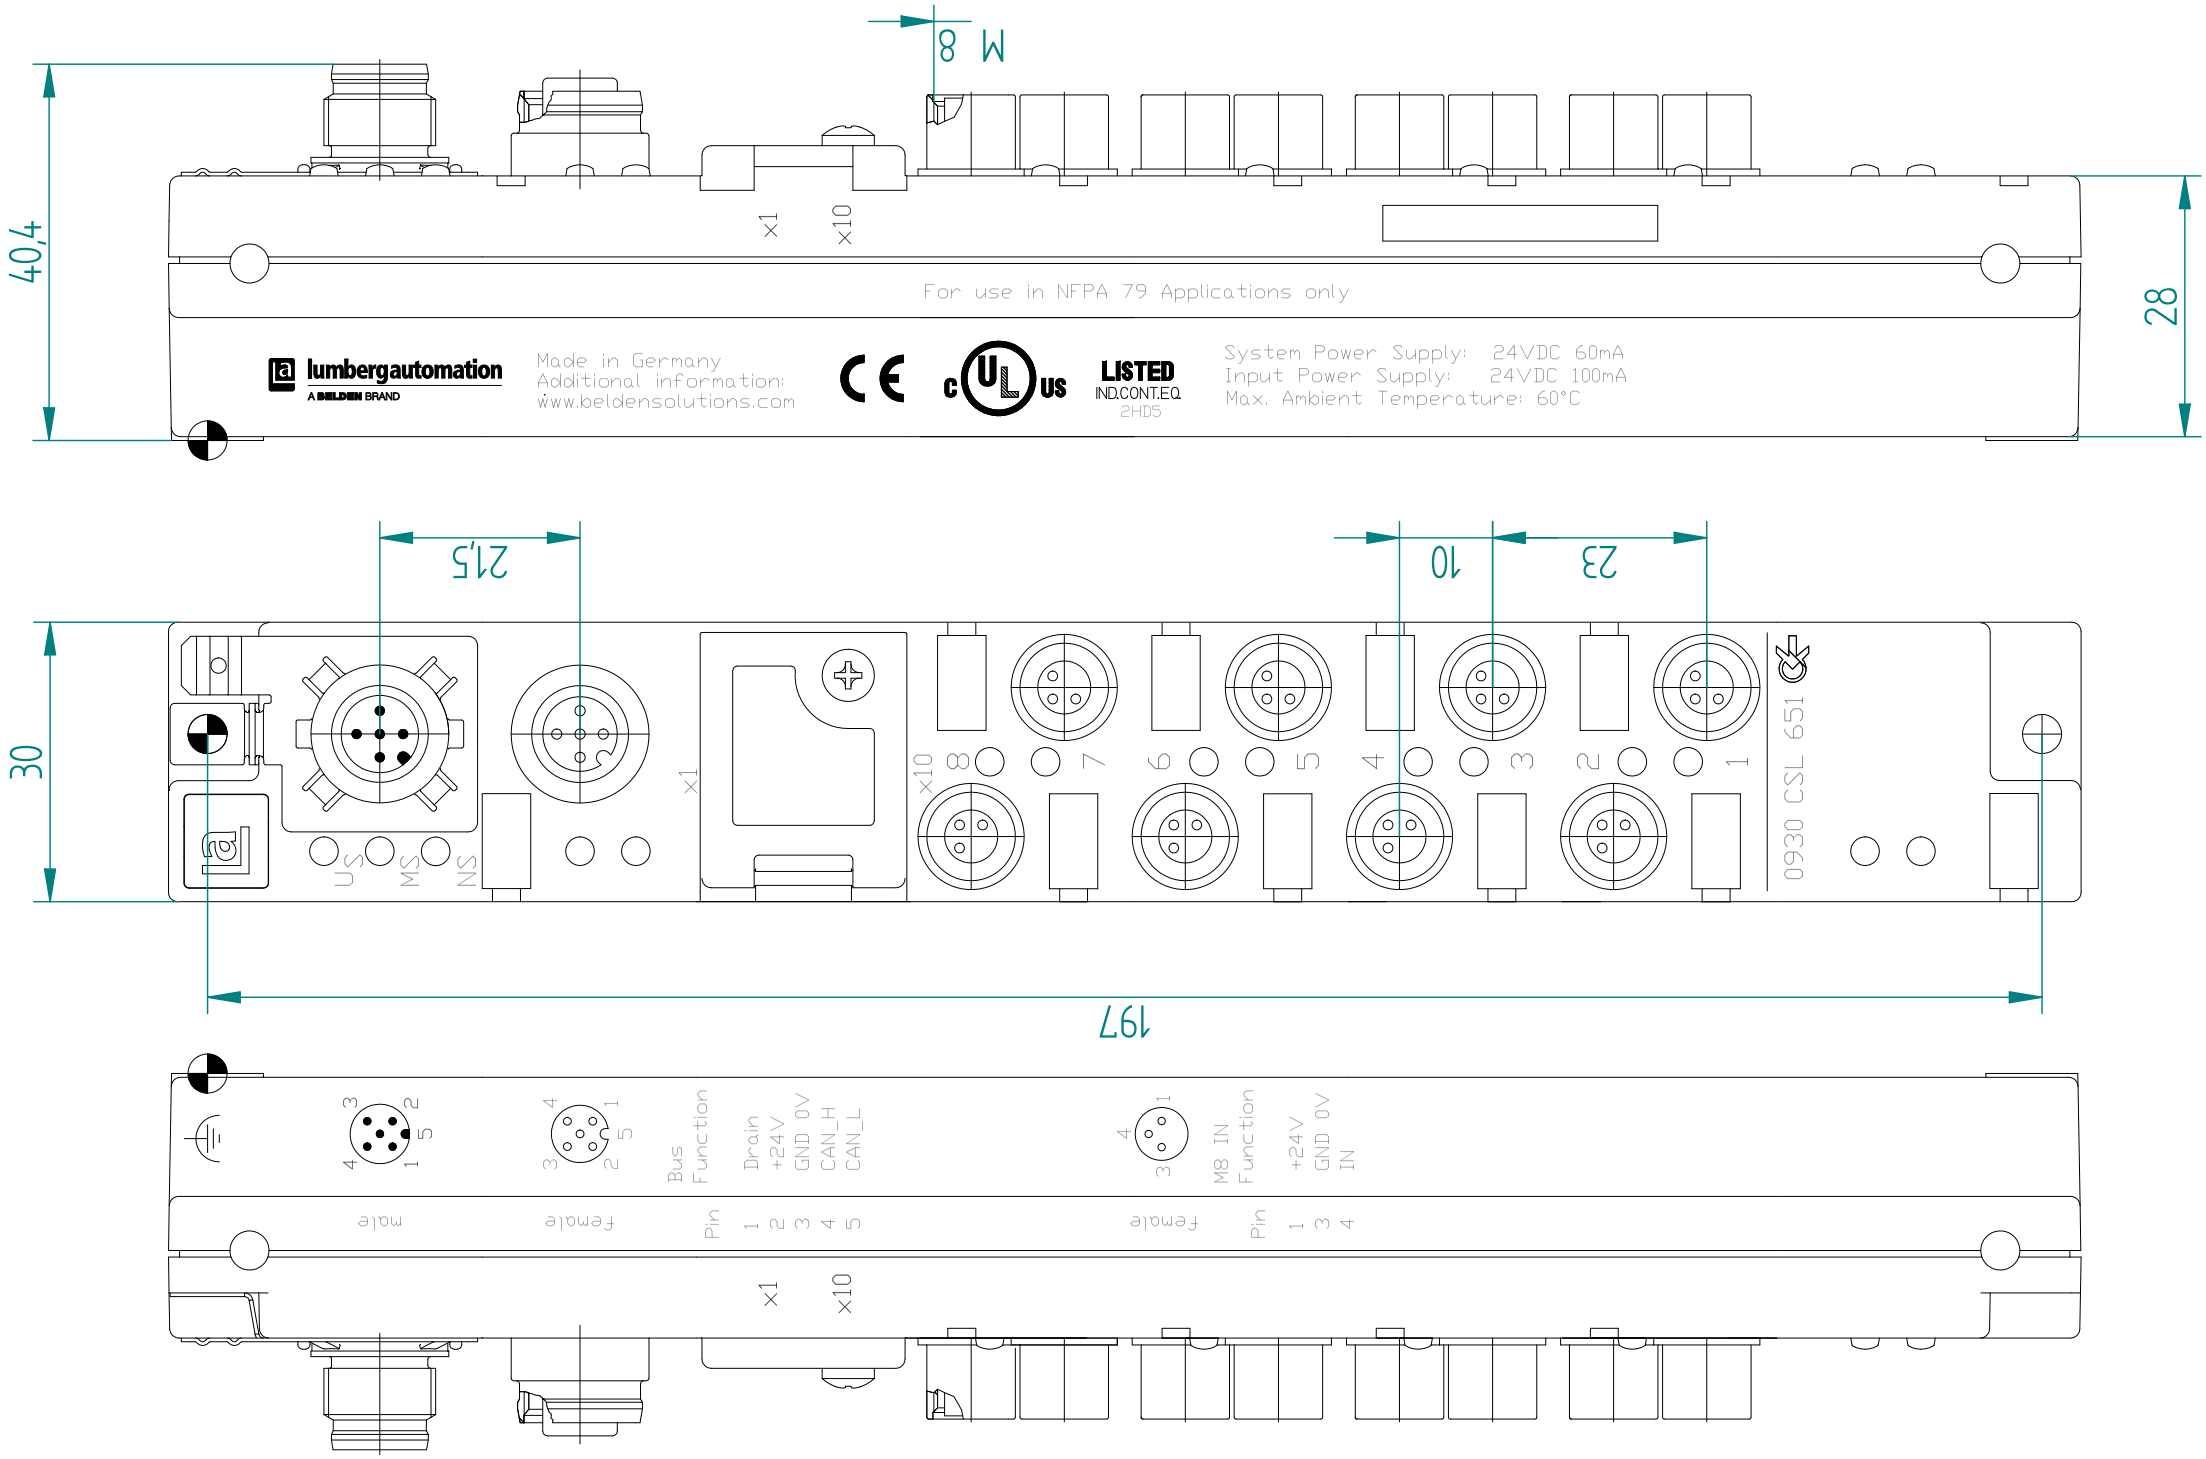
M 8
40,4
28
x1
x10
For use in NFPA 79 Applications only
lumbergautomation
A BELDEN BRAND
Made in Germany
Additional information:
www.beldensolutions.com
LISTED
IND.CONT.EQ.
2HD5
System Power Supply: 24VDC 60mA
Input Power Supply: 24VDC 100mA
Max. Ambient Temperature: 60°C
21,5
10
23
30
197
US
MS
NS
0930 CSL 651
male
female
Pin
Bus Function
Drain
+24V
GND 0V
CAN_H
CAN_L
M8 IN Function
IN