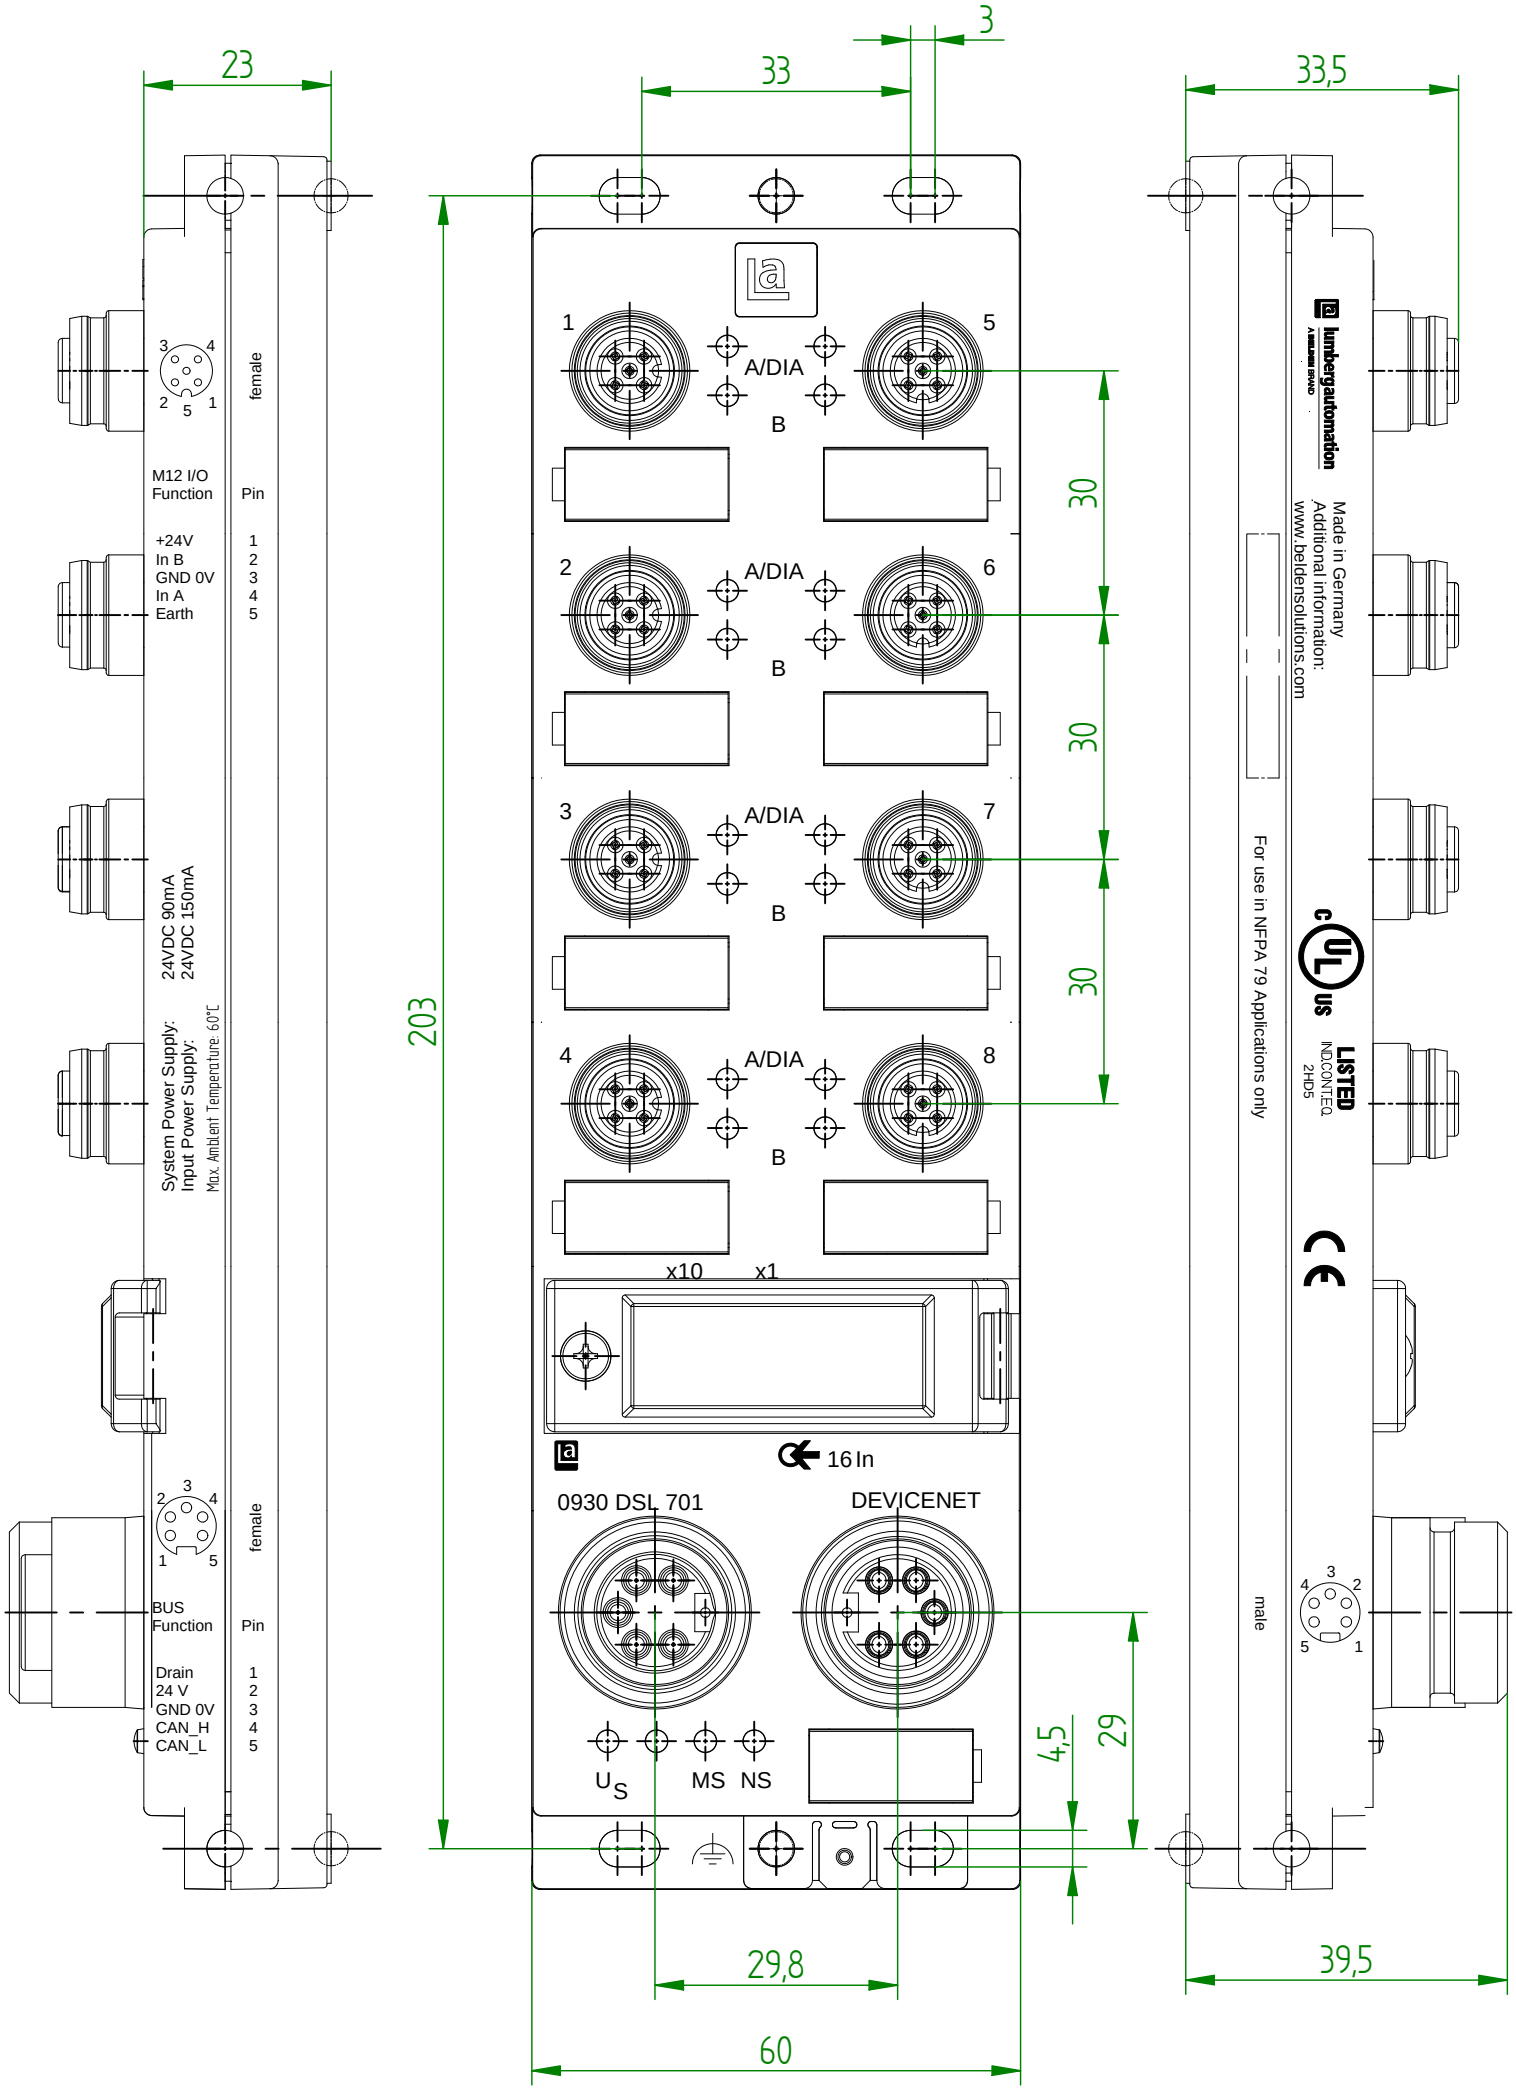
23
33
3
33,5
203
30
30
30
29
4,5
29,8
60
39,5
female
M12 I/O
Function
Pin
+24V 1
In B 2
GND 0V 3
In A 4
Earth 5
24VDC 90mA
24VDC 150mA
System Power Supply:
Input Power Supply:
Max. Ambient Temperature: 60°C
female
BUS
Function
Pin
Drain 1
24 V 2
GND 0V 3
CAN_H 4
CAN_L 5
A/DIA
B
x10
x1
16 In
0930 DSL 701
DEVICENET
US
MS
NS
lumbergautomation
Made in Germany
Additional information:
www.beldensolutions.com
For use in NFPA 79 Applications only
LISTED
IND.CONT.EQ.
2HD5
male